

## THE PPI AQUA-SHUTTLE KIT

The Aqua-Shuttle Kit is easy to install and operate. Place the Aqua-Shuttle where you want to water. Click the end of the hose onto the Aqua-Shuttle. Position your Adjustable Dripper on Stake near to the plants of your choice. Turn on your garden tap and set the adjustable taps on your Aqua-Shuttle.

### The PPI Aqua-Shuttle

#### End Cap


Can be removed for flushing your Aqua-Shuttle or extending your watering system using the Back to Back Nut. See instructions inside for more details.

#### Flow Arrow

Always install your Aqua-Shuttle in the direction of water flow.

#### Bug Cap

Prevents insects from crawling inside and clogging the outlets.

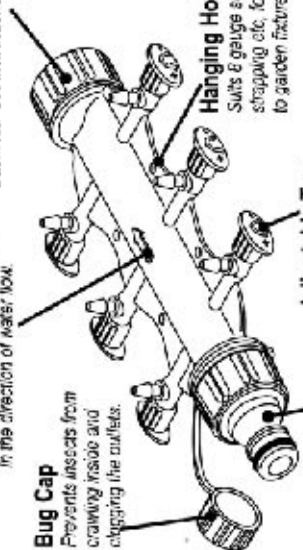


#### Adjustable Taps

Regulates the amount of water for each Adjustable Dripper on Stake. The taps are ergonomically designed to be comfortable and easy to operate.

#### Hanging Holes

Suits 8 gauge screws, cable ties, strapping etc. for securing to garden fixtures.

### 4mm Flexible Tubing (12 metres)

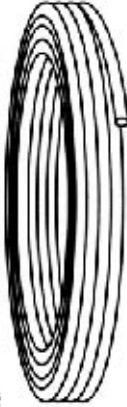


### Adjustable Dripper on Stake (6)


For localised water application to individual plants in gardens or landscape areas. The Adjustable Dripper on Stake is ideal for distributing the right amount of water to either tubs, small pots, or garden plants by positioning one stake per plant. Adjust the cap on the dripper from 'off' to 'full' flow.

## HOW TO USE THE PPI AQUA-SHUTTLE


We have an easy step by step guide explaining how to install and use your new Aqua-Shuttle.

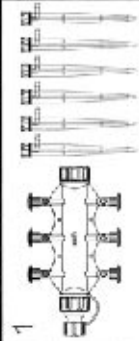


Layout the contents of your kit. Unwind the 4mm flexible tube and allow it to straighten.

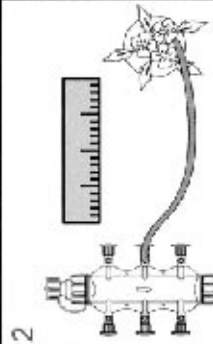

Measure and cut to length the 4mm flexible tube needed to go from the Aqua-Shuttle to your plant.

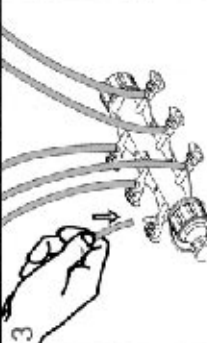


Push the 6 out pieces of 4mm flexible tube onto the bars on the Aqua-Shuttle. If only 5 outlets are required, shut off those taps you are not using.

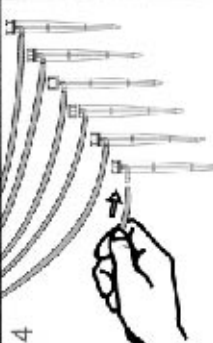


Open the caps of the Adjustable Dripper on Stake fully. Connect the other end of the 4mm flexible tube to the bars of the stake.




Fully open all connected adjustable taps on the Aqua-Shuttle. Ensure the taps not required for watering are turned 'off'.

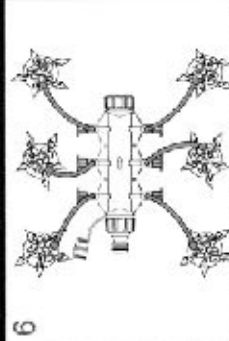


Position your Aqua-Shuttle in its final location, secure it using the hanging holes if necessary, and position the Adjustable Dripper on Stakes.

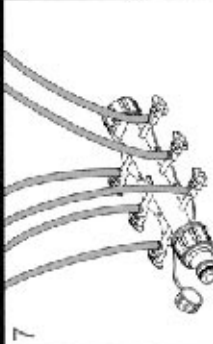

Remove the Bug Cap from the inlet of the Aqua-Shuttle.

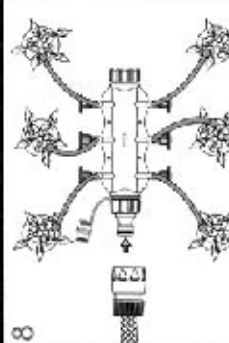

Connect your garden hose to the 12mm clip-on end on your Aqua-Shuttle.

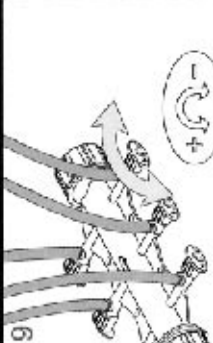

Turn on the garden tap and adjust the water flow to each plant with the adjustable taps on your Aqua-Shuttle.



When you have finished watering your plants return your garden hose and replace the Bug Cap.